

Lingotto floor



Lingotto wall

Lingotto is composed of an optic bay made of die-cast aluminum, a 99.85% extra-pure aluminum sheet reflector, a die-cast aluminum frame, high quality silicon gasket and nickel plated screws.

The optic bay is secured to a steel rod joined to a cast aluminum fork for wall application.

The optic used for the Lingotto serie is the asymmetric type with a maximum brightness distribution at 45°.

The optics bay is available in two versions: halogen and 150W discharge lamps.

The spotlights are connected by an articulated joint permitting a 58° adjustments to the vertical.

The technical specifications of the unit comply with EN60598-1 and the fixture

is rated
IP 40
UL Listed






Lingotto ceiling



The components of the lingotto are entirely made of high quality aluminum and the optic bay is protected by a glass that ensure a IP40 compliance.

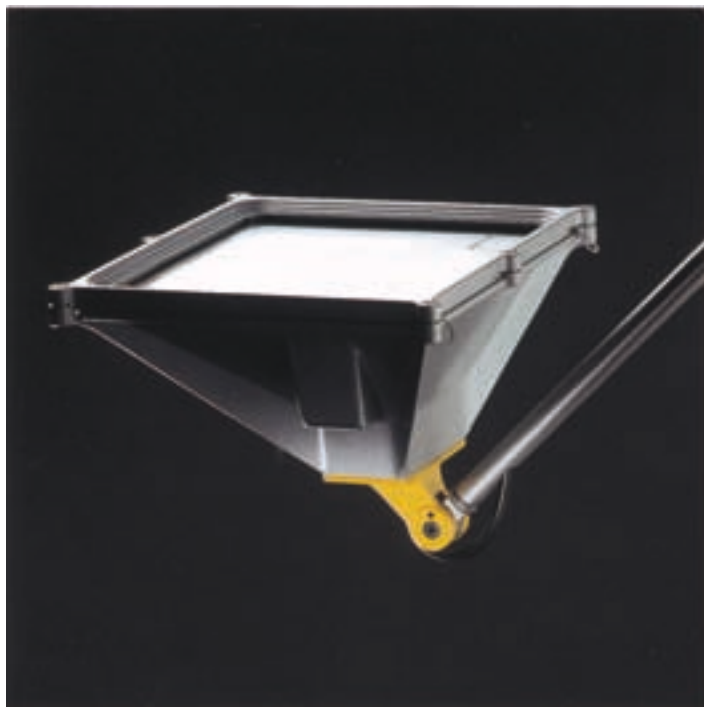


The extra components included with the discharge lamps configurations are housed in an aluminum container, connected to the fitting by means of a spiral cable.




Three versions are available:

- Floor
- Wall
- Ceiling

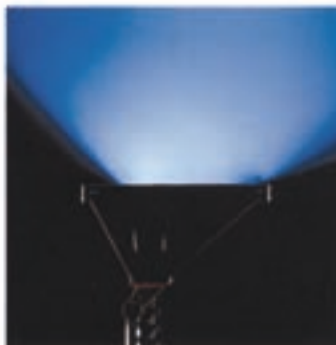All fittings are equipped with asymmetric optics.



The asymmetric optics produces its maximum luminous intensity at 45°. It is therefore especially suitable for indirect lighting.



Floor lamp	Ceiling	Wall
		
Asymmetric		






Wall with metal halide

I.5380-120 150W T6 R7s
I.5380-277 150W T6 R7s

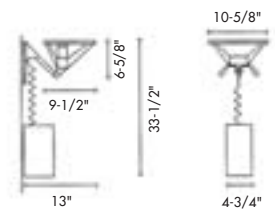



Complete with integral electronic ballast

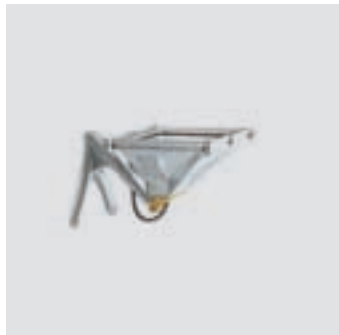

Wall with halogen

I.5381 300W T3 RSC

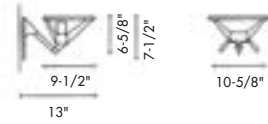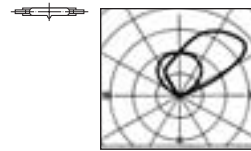


Available 120V only




Certicom, Mayhew & Ass./H.H. Angus

Photometric files are available at: www.sistemalux.com/photometric

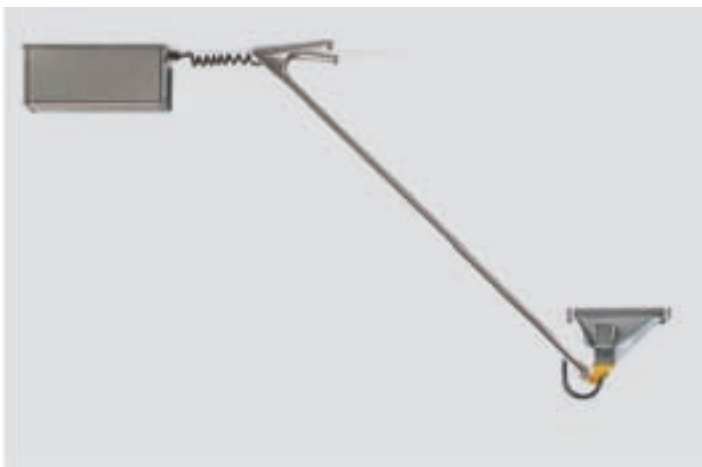

Ceiling with metal halide

- I.3214-120** 150W T6 R7s
- I.3214-277** 150W T6 R7s

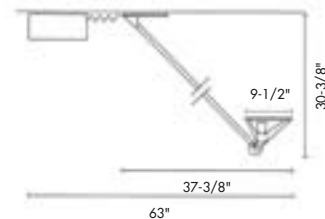


Complete with integral electronic ballast



Ceiling with halogen

- I.3215** 300W T3 RSC

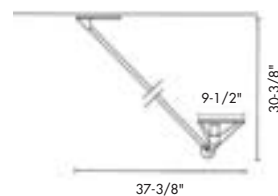


Available 120V only




Floor lamp with metal halide

I.4542 150 W T6 R7s



Luminaire equipped with cable, plug and switch.

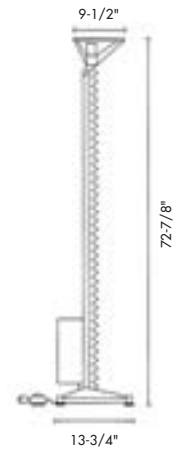


Complete with integral electronic ballast
Available 120V only



Floor lamp with halogen

I.4543 300 W T3 RSC



Luminaire equipped with cable, plug and switch.



Available 120V only

Photometric files are available at: www.sistimalux.com/photometric